

VANGUARD VL34 HELI-DECK

90 Min
Operation




VL34 with wire guard


FEATURES AND BENEFITS

Meets CAA (CAP 437) for helicopter landing area lighting • Maintenance free (> 60,000 hours operation)* • Emergency version available

CERTIFICATION & APPROVALS

IECEX Certificate IECEx BAS.08.0038X
ATEX Certificate Baseefa08ATEX0102X

Non Emergency:
 II 2 GD
 Ex e mb IIC T4 Gb
 Ex tb IIC T100°C Db




Emergency:
 II 2 GD
 Ex e ib mb IIC T4 Gb
 Ex tb IIC T100°C Db

Ambient temperature range:
-45°C TO +55°C

Ingress protection to IP66 and IP67

Meets current CAA (CAP 437)
and ICAO guidelines for
helicopter landing area lighting

DIMENSIONS

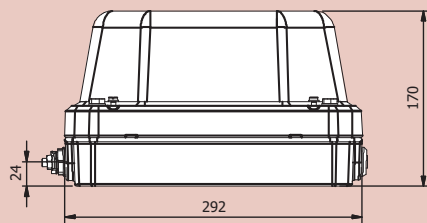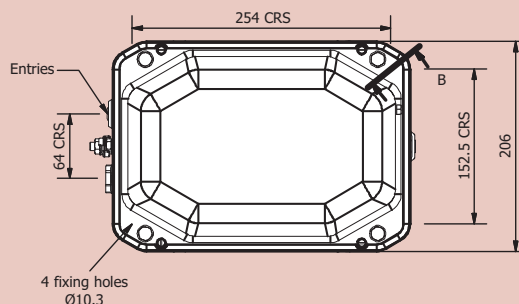

Dimensions in millimetres

