

Special Tensioning
Tools designed on request.

Tentec®

www.tentec.net


Topside Bolt Tensioning

Series: CTST Range

The CTST range of bolt tensioning tools are some of the most compact and reliable tensioners available today. Below are special features that are incorporated in their design.


Seal Reliability

Seal reliability is a fundamental requirement. All tensioners have polyurethane self-energising lip seals requiring no adjustment. The seals 'snap fit' into the piston housing, remain firm and will not dislodge to cause failure after prolonged use. As the seals are machined and not moulded, size is not restricted, allowing no compromise in tensioner design. The TENTEC seal exhibits a much lower coefficient of friction than nitrile seals used in many other hydraulic bolt tensioners. This benefit, in conjunction with a special anti-extrusion device, allows the tool piston/ram to be returned to its closed position with minimal effort.

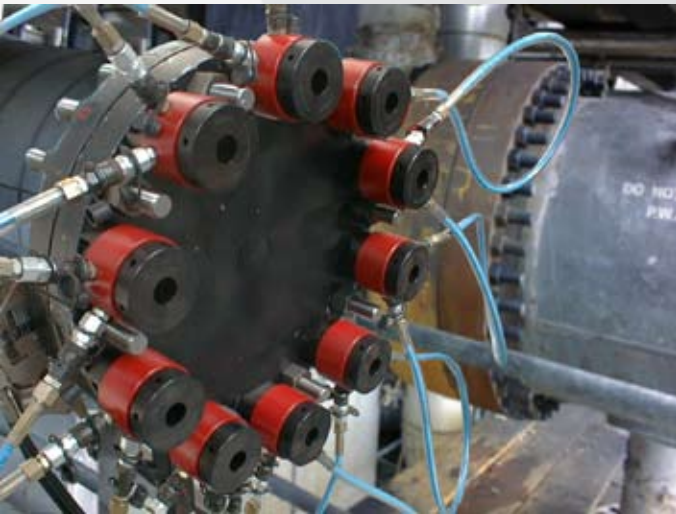

Link Hose System

One of the many advantages of hydraulic bolt tensioning, is the ability to link a number of tensioners together and load simultaneously all the bolts on a joint. Although this gives excellent load distribution, an enormous variety of flexible hose assemblies are necessary - which confuse the user. To overcome this problem TENTEC offer a single assembly called a 'Link hose'. This length of flexible high pressure hose, fitted with male and female quick connect couplings at opposite ends is fast and an economical method of connecting multiple tensioners together - the number of hoses required is the same as the number of tools to be linked - a simple formula to remember.

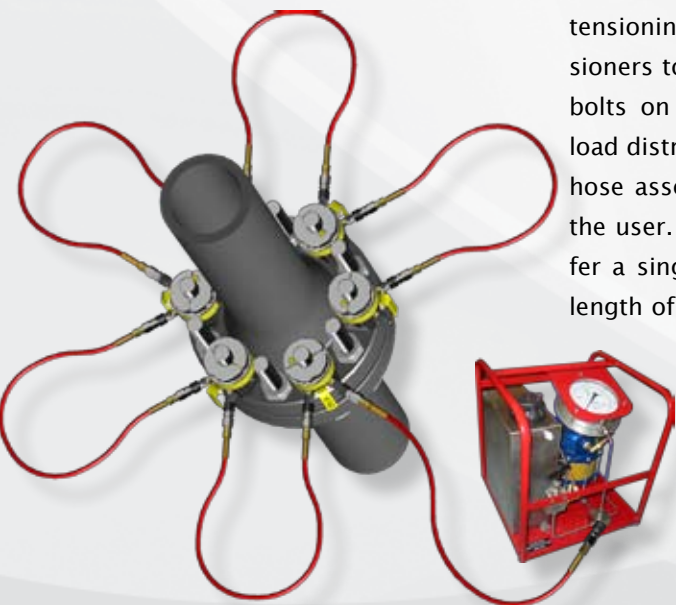

Features & Benefits

- High quality polyurethane seals for reliable, leak free operation
- Powerful bolt load capacity
- 15mm Ram Stroke
- Only 6 Base tools to cover bolt sizes 3/4" to 4"
- Supplied with Nut Rotating Sockets, no need for drilled nuts.
- Over stroke pressure safety device
- Manufactured from high strength steel for long life.
- Easy Hose assembly with Tentec

Link Hose System.



Tentec are an innovative designer of special purpose bolt tensioning equipment with a high level of focus on quality. The company have accreditation to ISO 9001, ISO 14001:2004 & ISO 18001.


Tentec products are subject to continual development and Tentec reserve the right to make changes in the specification and design of these products without prior notice. All rights reserved. Reproduction in whole or in part without the permission of Tentec Limited is prohibited.

© 2009 - Tentec Limited

Tentec Limited
Plymouth House
Guns Lane.
West Bromwich. West Midlands
United Kingdom. B70 9HS
Telephone: +44(0)121 524 1990
Fax: +44(0)121 525 1999
e-mail: sales@tentec.net
Internet: www.tentec.net

Published: January 2009


Technical Specifications

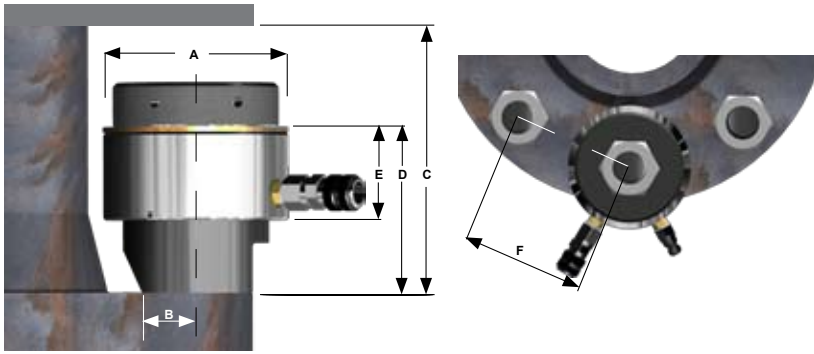


Tool No	Part No Imperial	Thread		Part No Metric	Bolt Load		Ram Area		Stroke mm	Weight kg	A	B	C	D	E	F
		Inch	mm		Kn	Ton	In ²	mm ²			mm					
1			16	1CTST:0016	228	23	2.35	1516	10	3.5	73	24	110	74	45	49
	1CTST:-0750	3/4	18	1CTST:0018	228	23	2.35	1516	10	3.5	73	24	110	74	45	49
			20	1CTST:0020	228	23	2.35	1516	10	3.5	73	27	110	74	45	51
	1CTST:0875	7/8	22	1CTST:0022	228	23	2.35	1516	10	3	73	27	115	74	45	51
	1CTST:1000	1	24	1CTST:0024	228	23	2.35	1516	10	3	73	30	125	78	45	60
	1CTST:1125	1 1/8	27	1CTST:0027	228	23	2.35	1516	10	3	73	32	130	78	45	60
2			30	2CTST:0030	443	45	4.58	2955	15	5	102	30	150	90	54	72
	2CTST:1250	1 1/4	33	2CTST:0033	443	45	4.58	2955	15	5	102	34	150	90	54	74
	2CTST:1375	1 3/8	36	2CTST:0036	443	45	4.58	2955	15	5	102	36	160	95	54	76
	2CTST:1500	1 1/2	39	2CTST:0039	443	45	4.58	2955	15	5	102	38	170	100	54	80
3	3CTST:1500	1 1/2	39	3CTST:0039	811	81	8.38	5406	15	9	132	42	175	95	56	88
	3CTST:1625	1 5/8	42	3CTST:0042	811	81	8.38	5406	15	9	132	42	185	100	56	90
	3CTST:1750	1 3/4	45	3CTST:0045	811	81	8.38	5406	15	9	132	44	195	103	56	94
	3CTST:1875	1 7/8	48	3CTST:0048	811	81	8.38	5406	15	9	132	46	205	107	56	100
	3CTST:2000	2	52	3CTST:0052	811	81	8.38	5406	15	9	132	48	210	112	56	104
4	4CTST:1875	1 7/8	48	4CTST:0048	1273	128	13.16	8490	15	15	163	50	205	105	56	110
	4CTST:2000	2	52	4CTST:0052	1273	128	13.16	8490	15	15	163	52	215	108	56	112
	4CTST:2250	2 1/4	56	4CTST:0056	1273	128	13.16	8490	15	15	163	54	235	117	56	118
			60	4CTST:0060	1273	128	13.16	8490	15	15	163	54	238	120	56	126
	4CTST:2500	2 1/2	64	4CTST:0064	1273	128	13.16	8490	15	15	163	58	254	129	56	126
5	5CTST:2500	2 1/2	64	5CTST:0064	1830	184	18.9	12194	15	25	192	64	254	125	60	136
			68	5CTST:0068	1830	184	18.9	12194	15	25	192	72	258	130	60	144
	5CTST:2750	2 3/4	72	5CTST:0072	1830	184	18.9	12194	15	25	192	72	258	130	60	146
	5CTST:3000	3	76	5CTST:0076	1830	184	18.9	12194	15	25	192	74	258	141	60	154
6	6CTST:3000	3	76	6CTST:0076	2646	266	27.35	17645	15	44	231	76	260	146	64	162
			80	6CTST:0080	2646	266	27.35	17645	15	44	231	76	264	146	64	162
	6CTST:3250	3 1/4	85	6CTST:0085	2646	266	27.35	17645	15	44	231	78	272	148	64	174
	6CTST:3500	3 1/2	90	6CTST:0090	2646	266	27.35	17645	15	44	231	78	280	154	64	185
	6CTST:3750	3 3/4	95	6CTST:0095	2646	266	27.35	17645	15	40.5	231	99	300	168	64	200
	6CTST:4000	4	100	6CTST:0100	2646	266	27.35	17645	15	40.5	231	105	305	172	64	212

Simplified Procedure.


Note: for clarity the pressure hose is not show on the following diagrams.



Assemble the bolt tensioning tool onto the bolt to be tensioned.



Pressurise the bolt tensioning tool. The nut will raise and the bolt will stretch.



Once the target pressure is reached 'hold' the pressure and rotate the nut back down against the joint face.




Release the pressure. The bolt is now loaded and the tool can be removed.

Maximum working pressure = 21750 psi : 1500 bar

If the standard tensioner is not suitable Tentec offer special tensioner designs on request.

Associated Equipment

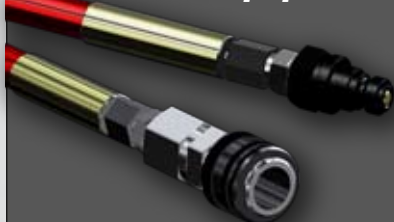

High pressure flexible hose



High pressure Hand Pumps



High pressure Air Pumps

Refer to associated technical datasheet